


- Material:
 - Contact: Phosphor Bronze
 - Insulator: PBT+30%
 - G.F. UL
 - Shell: SPCC
- Mechanical:
 - Mating: 35N max.
 - Withdrawal Force: 10N min.
 - Durability: 1500 cycles min.
- Electrical:
 - Current-max (amps) 1.5A
 - Voltage-max (volts) 30V
 - Withstanding Voltage 750V AC
 - Contact Resistance (ohms) 30 milliohms max insulation Resistance (ohms) 1000 Megohms min.
- Plating:
 - Contacts: Gold And Tin Over Nickel Plated
 - Shell: Nickel over all plating.
- Environmental:
 - Temperature Range: -55 to 85

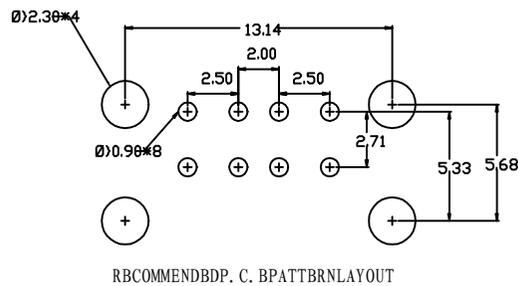

RBCOMMENDBDP. C. BPATBRN LAYOUT

产品图 MANUFACTURE DWG		公差一览表 TOLERANCE UNLESS OTHERWISE		深圳市威联创电子科技有限公司 电话: 0755-27383199 传真: 0755-27383199			
单位 UNIT	MM		INCH	产品名称	USB A/F 双层90度卷边弯脚		
.X	±0.20	.X	±---	角法 VIEW	制图 DRAWING	审核 CHKD	
.XX	±0.10	.XX	±---	比例 SCALE	设计 DESIGN	核准 APPD	
.XXX	±0.05	.XXX	±---	版本	图号	CKC1	张数 1/1
2013.08.29							